

# DOMETIC GENERATORS

230 VOLTS – ANYTIME, ANYWHERE



Dometic generators ensure a reliable power supply wherever mains power is unavailable. This makes them indispensable for everyone seeking maximum independence on the move.

High performance, modest fuel consumption and excellent product quality are the features you can expect to find in every Dometic generator. The range includes models from 2000 to 6200 watts, fuelled with petrol or Diesel.

## BENEFITS

- Highly compact design
- High continuous output
- Suitable as a power source for Dometic air conditioners
- Remote control included
- TEC models: Auto start function for automatic battery recharging
- Petrol fuelled TEC models: variable speed, economical fuel consumption, low-noise operation



VARIABLE  
SPEED

- T model and Diesel fuelled models: constant speed





CONSTANT SPEED

**DOMETIC TEC 29**

2.6 kW generator for 230 volts AC, fuelled by petrol or by diesel



TEC 29

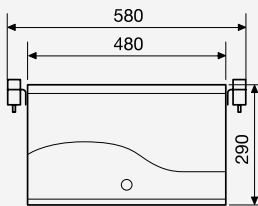


TEC 29	
<b>Output voltage</b>	230 V AC $\pm 1\%$ (continuous)/ pure sine wave $\sim$
<b>Total distortion factor</b>	1%
<b>Frequency</b>	50Hz $\pm 1\%$
<b>Max. starting current</b>	33 A
<b>Continuous output</b>	2,600 W
<b>Peak power</b>	2,900 W
<b>Engine output</b>	4.0 (5.5) kW (PS)
<b>Operating mode/fuel</b>	Normal unleaded ROZ 91 petrol
<b>Power consumption</b>	max. 1.2 l/h
<b>Sound level at 7 metres</b>	54–59 dBA
<b>Guaranteed sound level</b>	86 dBA
<b>Size (W x H x D)</b>	480 x 290 x 385 mm
<b>Width with suspension</b>	580 mm
<b>Housing finish</b>	Stainless steel
<b>Weight</b>	44 kg
<b>Auto-start function</b>	yes
<b>12-volt output for battery charging</b>	yes
<b>Quality features</b>	Automatic low-oil cut-off, electrical starter, short circuit protection, soundproofed operation via external control panel, alarm functions, variable generator speed
<b>Test marks</b>	E13

Product	Ref. No.
Dometic TEC 29	9102900299
<b>/ Optional extras</b>	
Plastic petrol tank with lock cap and fuel reserve float, 15 litres	9102900009
Plastic petrol tank with supports and feed-mouth incorporated, 15 litres	9102900010
20-litre stainless steel tank	9102900011
Hose set	9102900003
Flexible metal hose 25 mm, 2 m	9102900137
Flexible metal hose 25 mm, 5 m	9102900138

**DOMETIC TEC 30EV**

3.39

2.5 kW generator for 230 volts AC fuelled by diesel

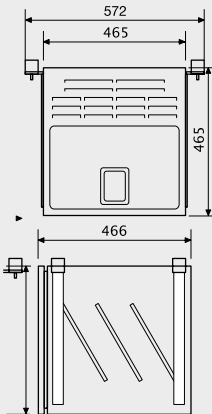


<b>Output voltage</b>	230 V AC $\pm 1\%$ (continuous)/pure sine wave $\sim$
<b>Total distortion factor</b>	1%
<b>Frequency</b>	50 Hz $\pm 1\%$
<b>Max. starting current</b>	33 A
<b>Continuous output</b>	2,500 W
<b>Peak power</b>	2,900 W
<b>Engine output</b>	3.3 (4.5) kW (PS)
<b>Operating mode/fuel</b>	Diesel
<b>Power consumption</b>	max. 0.7 l/h
<b>Sound level at 7 metres</b>	60 dBA
<b>Guaranteed sound level</b>	84 dBA
<b>Size (W x H x D)</b>	465 x 465 x 466 mm
<b>Width with suspension</b>	572 mm
<b>Housing finish</b>	Stainless steel
<b>Weight</b>	70 kg
<b>Auto-start function</b>	yes
<b>12-volt output for battery charging</b>	yes
<b>Quality features</b>	Automatic low-oil cut-off, electrical starter, short circuit protection, soundproofed operation via external control panel, alarm functions
<b>Test marks</b>	E13

Product	Ref. No.
Dometic TEC 30EV	9102900033
<b>/ Optional extras</b>	
Plastic petrol tank with lock cap and fuel reserve float, 15 litres	9102900009
Plastic petrol tank with supports and feed-mouth incorporated, 15 litres	9102900010
20-litre stainless steel tank	9102900011
Hose set	9102900003
Flexible metal hose 25 mm, 2 m	9102900137
Flexible metal hose 25 mm, 5 m	9102900138

**DOMETIC TEC 40D**

3.5 kW generator for 230 volts AC, fuelled by diesel


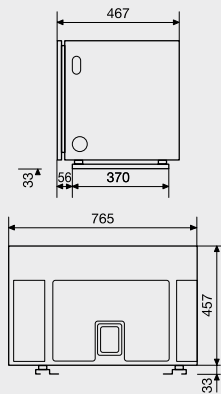


<b>Output voltage</b>	230 V AC $\pm 1\%$ (continuous)/pure sine wave $\sim$
<b>Total distortion factor</b>	5%
<b>Frequency</b>	50 Hz $\pm 1\%$
<b>Max. starting current</b>	45 A
<b>Continuous output</b>	3,500 W
<b>Peak power</b>	3,900 W
<b>Engine output</b>	4.7 (6.4) kW (PS)
<b>Operating mode/fuel</b>	Diesel
<b>Power consumption</b>	max. 1.4 l
<b>Sound level at 7 metres</b>	64 dBA
<b>Guaranteed sound level</b>	89 dBA
<b>Size (W x H x D)</b>	765 x 457 x 467 mm
<b>Width with suspension</b>	765 mm
<b>Housing finish</b>	Stainless steel
<b>Weight</b>	96.5 kg
<b>Auto-start function</b>	yes
<b>12-volt output for battery charging</b>	yes
<b>Quality features</b>	Automatic low-oil cut-off, electrical starter, short circuit protection, soundproofed operation via external control panel, alarm functions
<b>Test marks</b>	E24

Product	Ref. No.
Dometic TEC 40D	9102900295
<b>/ Optional extras</b>	
Plastic petrol tank with lock cap and fuel reserve float, 15 litres	9102900009
Plastic petrol tank with supports and feed-mouth incorporated, 15 litres	9102900010
20-litre stainless steel tank	9102900011
Hose set	9102900003
Flexible metal hose 25 mm, 2 m	9102900137
Flexible metal hose 25 mm, 5 m	9102900138

**DOMETIC T 2500H**

2.0 kW generator for 230 volts AC, fuelled by petrol


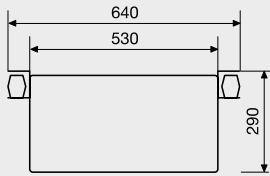


<b>Output voltage</b>	230 V AC $\pm$ 10 % (continuous)/pure sine wave $\sim$
<b>Total distortion factor</b>	5 %
<b>Frequency</b>	50 Hz $\pm$ 5%
<b>Max. starting current</b>	24 A
<b>Continuous output</b>	2,000 W
<b>Peak power</b>	2,200 W
<b>Engine output</b>	4.0 (5.5) kW (PS)
<b>Operating mode/fuel</b>	Normal unleaded ROZ 91 petrol
<b>Power consumption</b>	max. 1.2 l/h
<b>Sound level at 7 metres</b>	60 dBA
<b>Guaranteed sound level</b>	86 dBA
<b>Size (W x H x D)</b>	530 x 290 x 385 mm
<b>Width with suspension</b>	640 mm
<b>Housing finish</b>	Stainless steel
<b>Weight</b>	50 kg
<b>12-volt output for battery charging</b>	yes, with optional charging regulator
<b>Quality features</b>	Automatic low-oil cut-off, electrical starter, short circuit protection, soundproofed operation via external control panel
<b>Test marks</b>	E3

Product	Ref. No.
Dometic T 2500H	9102900005
<b>/ Optional extras</b>	
Plastic petrol tank with lock cap and fuel reserve float, 15 litres	9102900009
Plastic petrol tank with supports and feed-mouth incorporated, 15 litres	9102900010
20-litre stainless steel tank	9102900011
Hose set	9102900003
Flexible metal hose 25 mm, 2 m	9102900137
Flexible metal hose 25 mm, 5 m	9102900138
Battery charging regulator	9102900014
Floor chimney	9102900023
Change-over switch (generator / mains)	9102900013

**DOMETIC TEC 60EV**

6.2 kW generator for 230 volts AC, fuelled by regular unleaded petrol

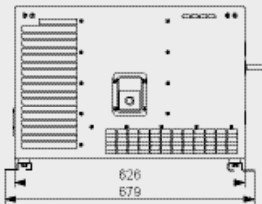

<b>Output voltage</b>	230 V AC $\pm 1\%$ (continuous)/ pure sine wave $\sim$
<b>Total distortion factor</b>	< 3 %
<b>Frequency</b>	50 Hz $\pm 1\%$
<b>Max. starting current</b>	85 W
<b>Continuous output</b>	6,200 W
<b>Peak power</b>	6,500 W
<b>Engine output</b>	6,0 (8,9) kW (PS)
<b>Operating mode/fuel</b>	Unleaded petrol
<b>Power consumption</b>	max. 3.7 l/h
<b>Sound level at 7 metres</b>	66 dBA
<b>Guaranteed sound level</b>	90 dBA
<b>Size (W x H x D)</b>	626 x 474 x 544 mm
<b>Housing finish</b>	Stainless steel
<b>Weight</b>	112 kg
<b>Auto-start function</b>	●
<b>12-volt output for battery charging</b>	●
<b>Quality features</b>	Low-oil cut-off, electrical starter, overload and short-circuit protection, sound insulation, operation via external control panel, alarm functions, variable generator speed
<b>Test marks</b>	E13
Product	Ref. No.
Dometic TEC 60EV	9102900303
<b>/ Optional extras</b>	
Plastic petrol tank with lock cap and fuel reserve float, 15 litres	9102900009
Plastic petrol tank with supports and feed-mouth incorporated, 15 litres	9102900010
20-litre stainless steel tank	9102900011
Hose set	9102900003
Flexible metal hose 25 mm, 2 m	9102900137
Flexible metal hose 25 mm, 5 m	9102900138